



114-112

# Maverick 1.28

Elongated Front, SmartHeight™  
Vitreous China, Two-Piece Toilet

## Features

- Contemporary design
- Elongated front, SmartHeight™ (16-1/2" high bowl)
- Chair height for maximum comfort
- High performance, high efficiency (HET) MagnaFlush III™ flushing technology with 3" flush valve virtually eliminates clogging
- 1.28 gpf / 4.86 lpf low water consumption
- SAVE MONEY! Uses less water than conventional 1.6 gpf flushing systems
- Maverick 1.28 qualifies for 1 LEEDS point
- Pilot operated anti-siphon fill valve
- 2-1/8" glazed trapway
- 12" rough-in
- Complete Maverick Suite includes self-rimming lavatories, pedestal lavatory and three sizes of toilets
- Upgrade with a color-match SmartClose™ or Primo™ toilet seat
- Available in White and Standard Colors: Biscuit, Classic Bone
- Model 51 side-mount trip lever, chrome plated metal trip lever (Consult Price Book for additional finishes)
- Also available with 112RH right hand trip lever or 112LT lined tank
- Meets or exceeds ANSI/ASME A112.192
- Meets or exceeds Canadian Standards Association CSA B45.0
- Outstanding protection — The Mansfield® limited lifetime warranty



Model 112RH Tank  
Shown with Model 51  
right hand trip lever



Model 112LT Tank  
Insulating inner tank liner  
reduces condensation on  
outside of tank

**1**  
LEEDS  
POINT

HIGH EFFICIENCY TOILET  
**HET**

Model 114-112  
Shown with SB1175  
SmartClose™ toilet seat



Model No.	Description	Approx. Wt.
114-112	Elongated front, SmartHeight™ (1.28 Gpf/4.86 Lpf) two-piece toilet. Includes tank trim and left hand, side mount chrome plated trip lever. Less toilet seat and supply. Specify color.	91 lbs. (41 kg)
114	Elongated front, SmartHeight™ toilet bowl only. 12" rough-in. Specify color.	60 lbs. (27 kg)
112	Tank and cover only, with left hand side mount, chrome plated trip lever. Less supply. Specify color.	31 lbs. (14kg)
112RH	Same as 112, except with right hand, chrome plated trip lever. Less supply.	31 lbs. (14kg)
112LT	Same as 112, except with insulated tank liner. Less supply.	31 lbs. (14kg)
SB1175	Elongated, SmartClose™ toilet seat. Specify color.	5.5 lbs. (2 kg)
SB1200	Elongated, Primo™ toilet seat. Specify color.	5.5 lbs. (2 kg)

**MagnaFlush III™**

**SmartHeight™**



114-112

# Maverick 1.28

Elongated Front, SmartHeight™  
Vitreous China, Two-Piece Toilet

## Features & Upgrades

### MagnaFlush III™ Flushing Technology

Featuring an extra large 3" flush valve, a pilot operated fill valve and our optimized 2-1/8" trapway. MagnaFlush III™ flushing technology offers a fast and powerful flush - every time. Performance Without Compromise.

*MagnaFlush III™*



### M400 Anti-Siphon Fill Valve

The M400 fill valve operates efficiently at low or high water pressures. Featuring a patented flow regulator and debris filter and positive shut-off for added functionality. Easily adjustable to retain optimum water level.



### 201 Flush Valve

Our newest 3" flush valve features a high volume flow rate for a quick and quiet flush action. Designed for maximum performance, it offers more than twice the potential flow rate of a conventional 2" flush valve. Non-corrosive and durable, it will provide years of dependable use.

### Add a Toilet Seat


With a simple touch, Mansfield's newest SmartClose™ toilet seat closes gently and quietly. Or upgrade your toilet with a popular Primo™ toilet seat. Made of durable, high impact, heavy-duty plastic. For all applications — Get More, Get Mansfield®.



## Technical Information

### Specifications

Material	Vitreous China
Water Pressure Range	20 to 80 P.S.I.
Flush System	MagnaFlush III™ Flushing Technology
Water Usage	1.28 Gpf / 4.86 Lpf
Water Surface Area	7-3/4" x 10-3/4"
Trap Diameter	2-1/8"
Trap Seal	3-1/8"
Rough-in	12"
Shipping Dimensions	Model 114 28-13/16" x 15-3/4" x 17-11/16" (732 mm x 400 mm x 449 mm) Model 112 / 112RH / 112LT 19-3/4" x 10" x 14-3/4" (502 mm x 254 mm x 375 mm)
Shipping Weight	Model 114 63 lbs (29 kg) Model 112 / 112RH / 112LT 34 lbs (15 kg)
Warranty	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

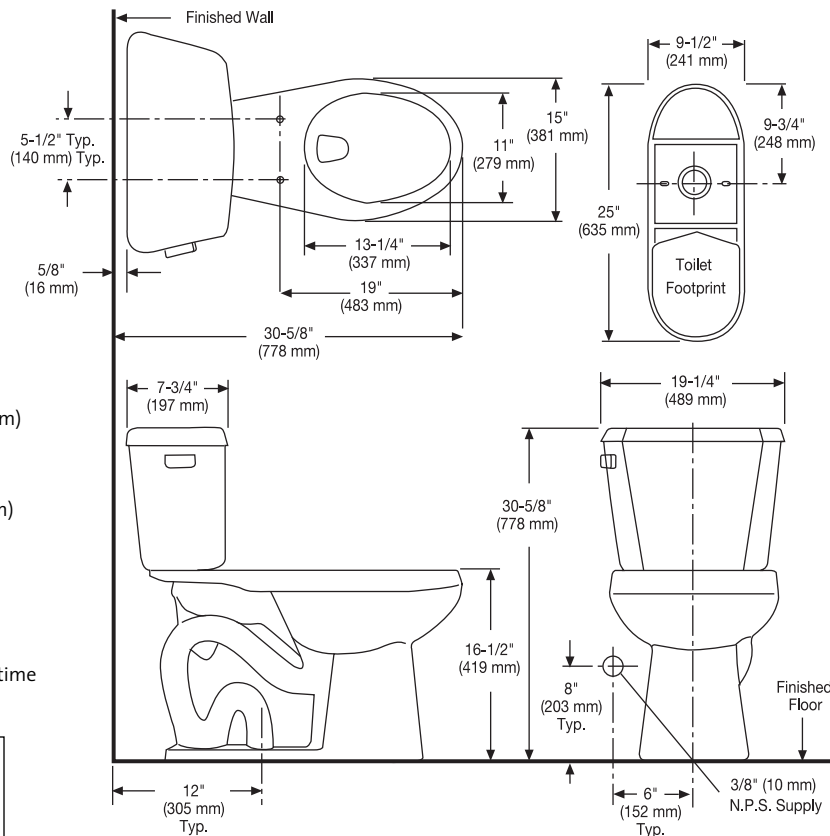

These dimensions are nominal and are subject to change without prior notice.  
Fixture performance and specifications meet or exceed, ANSI/ASME A112.19.2 standards and CAN/CSA B45.0 standards, and other state and local codes.  
Meets the Americans with Disabilities Act guidelines and ANSI/ASME A117.1 requirements where installed so top of seat is 17" from the finished floor.

NOTE: Install this product according to the installation guide.  
Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2

See our complete line of acrylic and vitreous china bathroom fixtures and plastic tank trim and plumbing products.

