










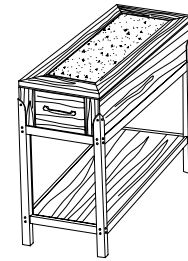
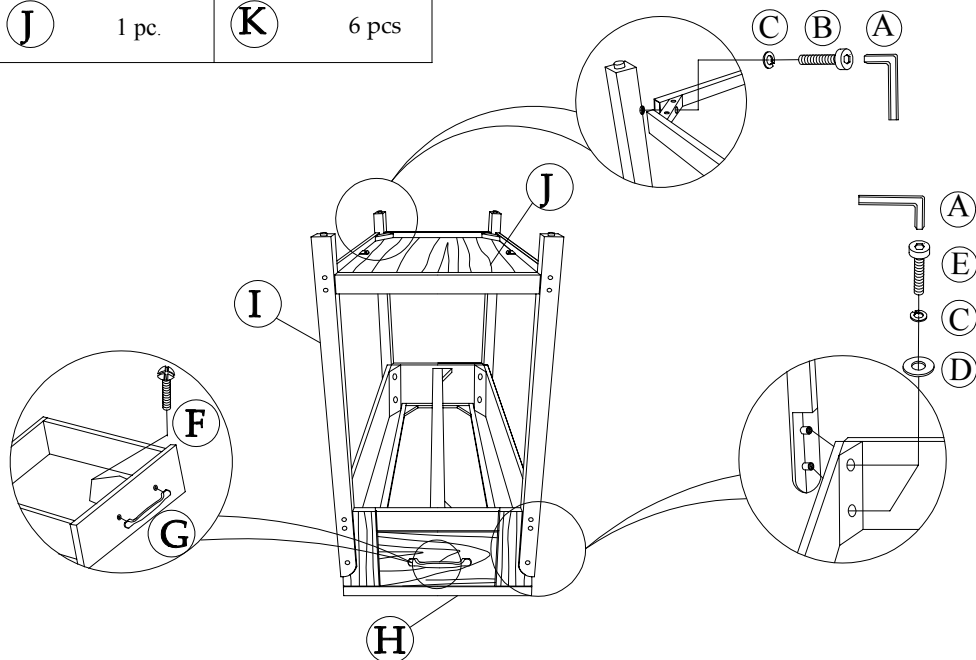


Components and Hardware List

<p>5mm Allen Wrench</p>  <p>A 1 pc.</p>	<p>M5/16" x 1 - 1/4" Allen Head Bolt</p>  <p>B 4 pcs.</p>	<p>5/16" Spring Washer</p>  <p>C 12 pcs.</p>	<p>5/16" x 22mm Flat Washer</p>  <p>D 8 pcs.</p>
<p>M5/16" x 2" Allen Head Bolt</p>  <p>E 8 pcs.</p>	<p>M5 x 3/4" Cross Head Bolt</p>  <p>F 2 pcs.</p>	<p>Drawer Pull</p>  <p>G 1 pc.</p>	<p>Top With Apron</p>  <p>H 1 pc.</p>
<p>Leg</p>  <p>I 4 pcs.</p>	<p>Bottom shelf</p>  <p>J 1 pc.</p>	<p>Plastic hole cover</p>  <p>K 6 pcs.</p>	



Be sure to check all packing material carefully for small parts, which may have come loose inside the carton during shipment.



Note:

1. Do not discard any packing materials until the table has been completely assembled, to prevent parts from being accidentally discarded. To prevent possible scratches or damages, assemble the table upside down on a soft surface such as a blanket or carpet, or its own packaging materials.
 2. Remove the drawer, attach three Legs (I) to the the Top With Apron (H) using Flat Washer (D), Spring Washer (C) and Allen Head Bolts (E). Do not fully tighten bolts until after Step 4.
 3. Attach the Bottom Shelf (J) to the Legs using Spring Washer (C) and Allen Head Bolts (B). Do not fully tighten bolts until after next step.
 4. Attach the fourth Leg (H) to the Top With Apron (H) & Bottom Shelf (J) using the same Washers and Bolts as in the previous steps.
 5. Tighten all the Bolts using the Allen Wrench (A).
 6. Carefully turn the table upright.
 7. Attach the Drawer Pull (G) to the drawer using Cross head bolt (F) and your screwdriver, then reinstall the drawer.
 8. Levelers are installed into the bottom of the legs and can be used to compensate for uneven flooring if necessary.
- Note: There are six (6) extra plastic 'rivets', or hole covers included and are fastened underneath the table top. If, in the rare occurrence that one does come off of the legs, simply press a replacement back into the hole and carefully tap with a hammer to firmly set into the hole. Please keep for future use.