

location:
DAMP
interior

SPECIFICATIONS:

DESCRIPTION

Cable-hung, cord-hung or stem-mount pendant with handcrafted glass diffuser.

LAMPING

Standard is 150W A21 120V incandescent, suitable for dimming.

CFL: 26W 4-Pin CFL with non-dimming electronic ballast. 120V.

SB-CFL: Self-ballasted GU-24 lampholders. 27W max, 120V.

Lamps not included.

DIFFUSER

Shade shall be handcrafted glass in various decors.

Diameter of 6.25" and height of 12.0"

SUSPENSION

Cable-hung: 1x 10' aircraft-quality stainless steel cable support with 10' AWM-type cord. Jacket tint coordinates with metal finish. 5" Dia. dome canopy is plated stamped steel. Bronze or Satin Nickel.

Cord-hung: 10' SJT-type cord. Jacket coordinates with metal finish. 5" Dia. canopy is stamped steel. Black or white powder-coat.

Stem-mount: 4 connectable stem sections (3", 6", 12" and 18" lengths) plus telescoping piece for up to 3" adjustment, 10' max. 5" Dia. canopy (with swivel) and stem sections are plated steel. Bronze or Satin Nickel




MOUNTING

Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

Consult factory concerning lower wattage labeling for energy requirements.

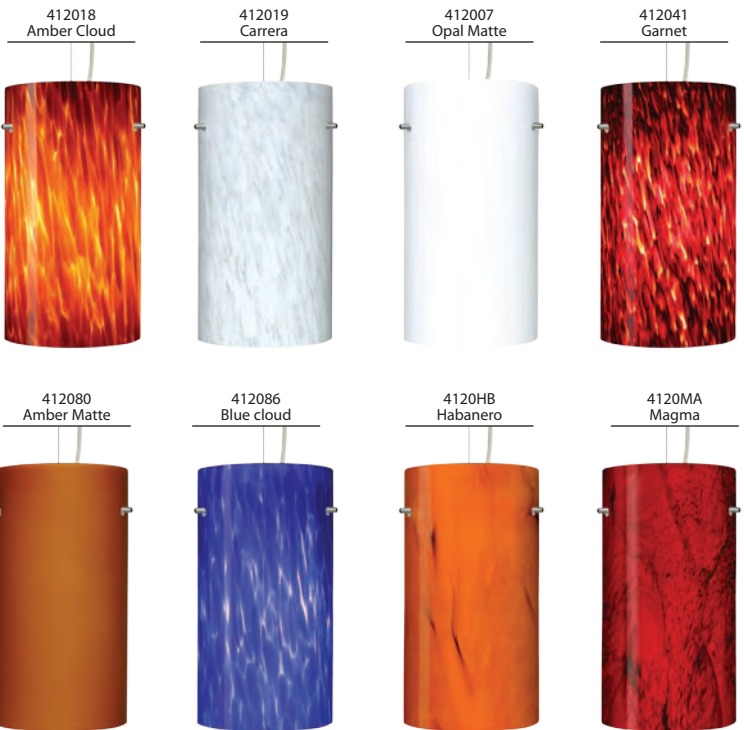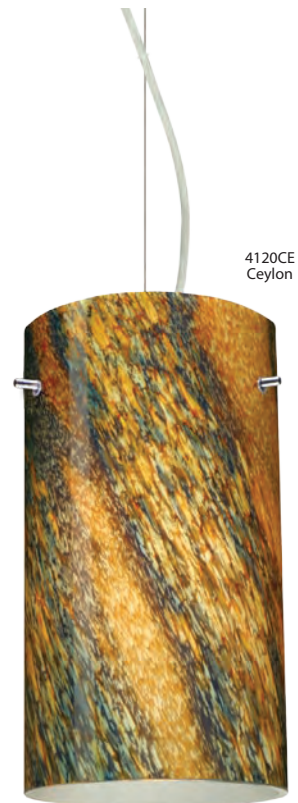

For ordering information, see next page

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 7/10


ORDERING:

<u>1x Cable Fixture</u>	<u>Decor</u>	<u>Lamping</u>	<u>K/T Metal Finish</u>		
1KX 1 Lt. Dome	412007 Opal Matte	() 150W A21 Incand.	BR Bronze		
	412018 Amber Cloud	H1 1x 26W TBX	SN Satin Nickel		
<u>Stem Fixture</u>	412019 Carrera	X1 27W GU-24 max	<u>V Metal Finish</u>		
1TC 1 Lt. CFL Dome	412041 Garnet	<i>H1 on 1KX/1VC/1TC only</i>	BK Black		
1TT 1 Lt. Flat	412080 Amber Matte		WH White		
	412086 Blue Cloud				
<u>Cord Fixture</u>	4120CE Ceylon				
1VC 1 Lt. Dome	4120HB Habanero				
1VT 1 Lt. Flat	4120MA Magma				
	4120VM Vanilla Matte				

PENDANT OPTIONS:


Cable-hung

- 1x Cable, 1x Lampholder
- Suitable for sloped ceilings




Stem-mount Options

- Flat style for incandescent, Dome style for CFL
- Swivel at canopy, suitable for sloped ceilings
- Includes 4 connectable sections (1x 3", 1x 6", 1x 12", 1x 18") plus telescoping piece for up to 3" adjustment



Cord-hung Options

- Dome style or Flat style
- Suitable for sloped ceilings
- 10' SJT Cord
- Black or White finish



Project Information:

ADDITIONAL STEM SECTIONS:

Additional connecting stems are available to increase overall length, up to a maximum 10'.

- T203-SN** or **T203-BR** 3" Section
- T206-SN** or **T206-BR** 6" Section
- T212-SN** or **T212-BR** 12" Section
- T218-SN** or **T218-BR** 18" Section