


- REMOVE HANDLE USING T-15 TORX BIT FOR THE HANDLE SCREWS.
- REMOVE LATCH BAR USING T-30 TORX BIT FOR LATCH BAR SHOULDER SCREWS.
- REMOVE LOCK RETAINING NUTS TO REMOVE THE LOCK. (PAY ATTENTION TO LOCK ORIENTATION)
- REMOVE KEEPER FROM OLD LATCH BAR AND INSTALL ON NEW ONE USING T-25 TORX BIT.

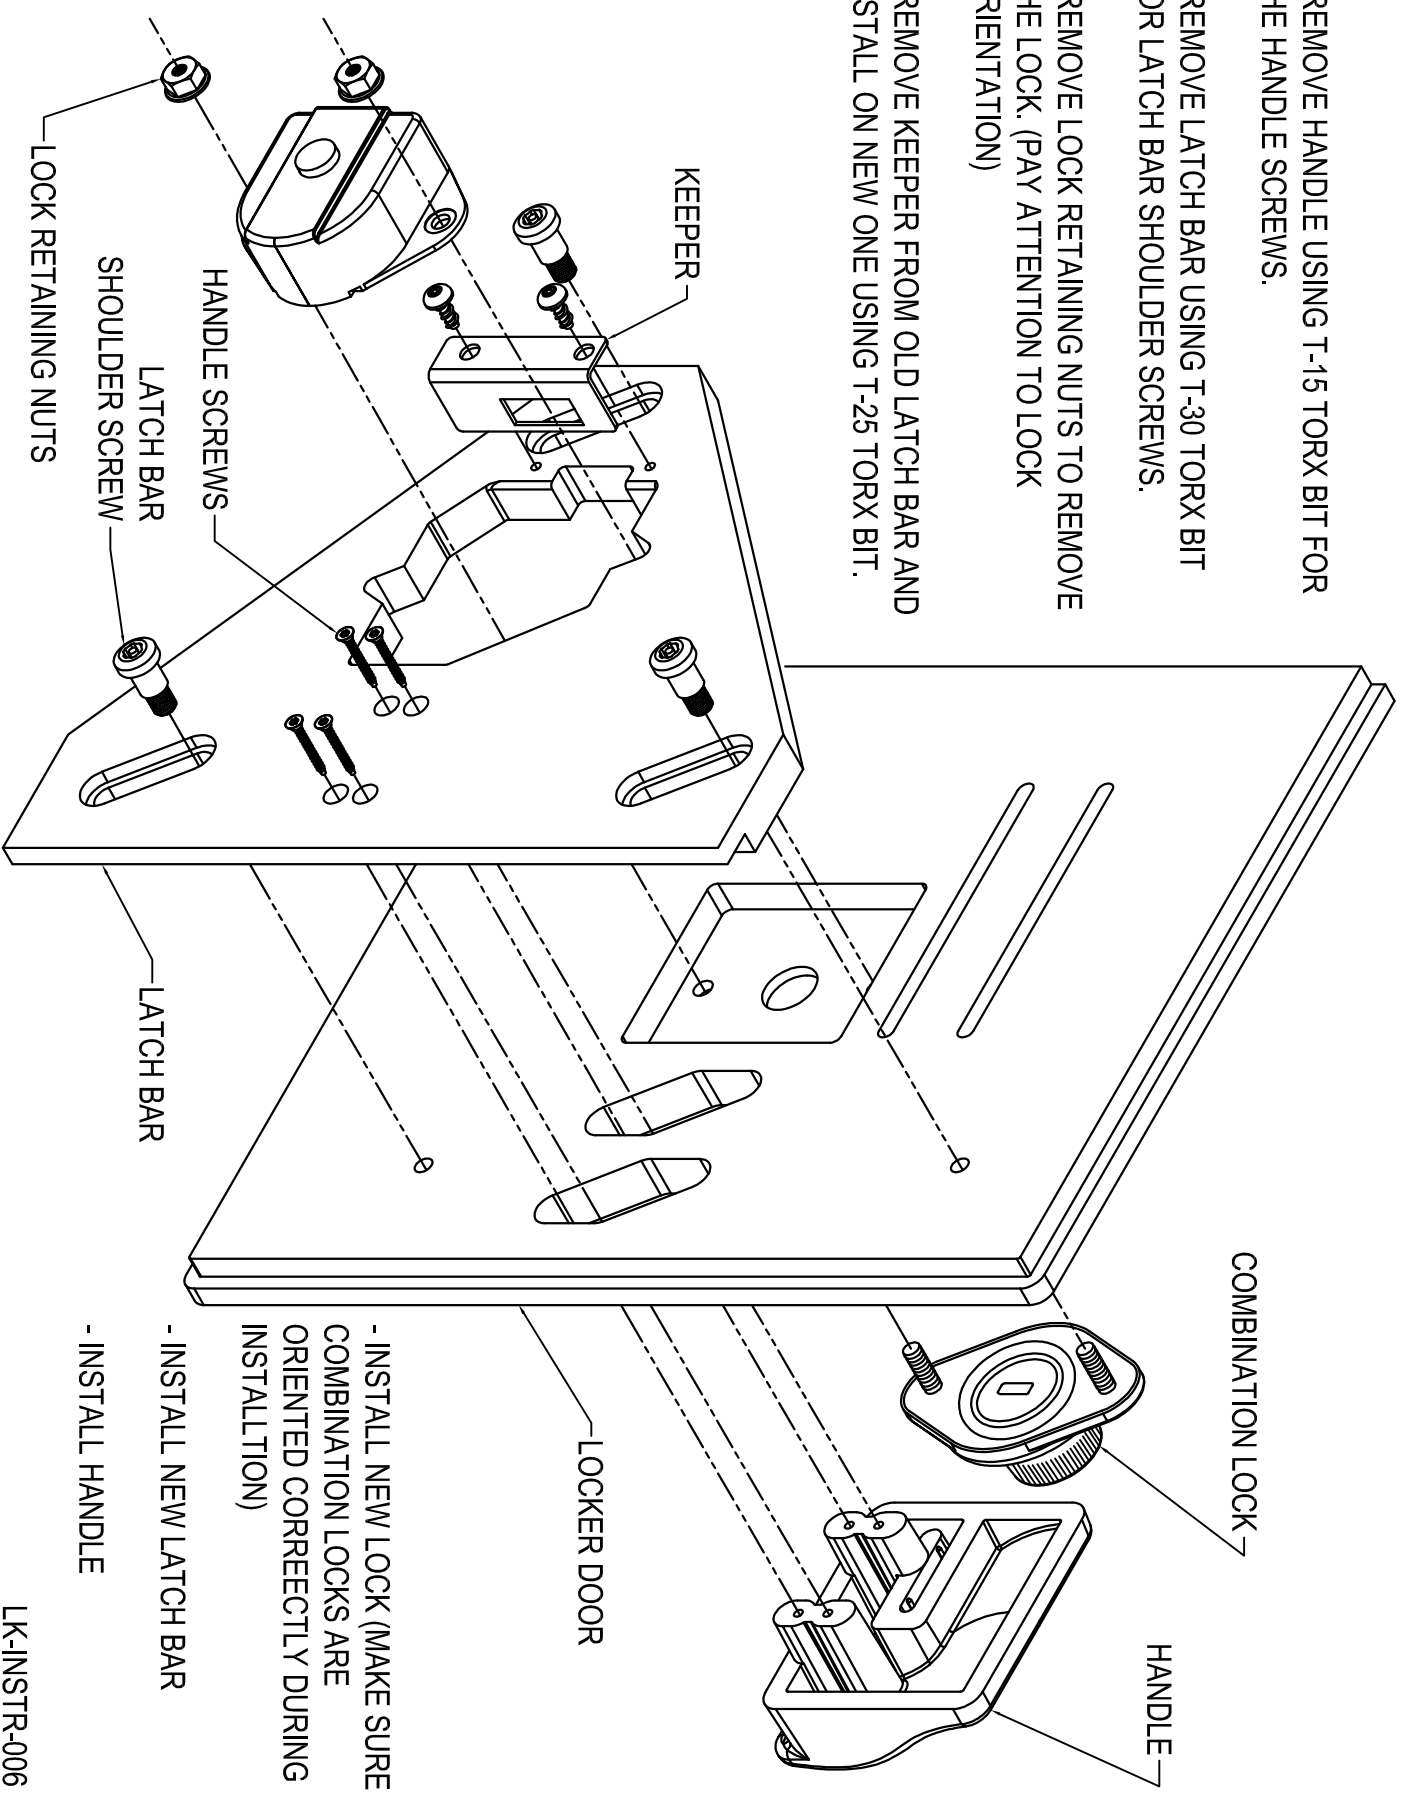

- INSTALL NEW LOCK (MAKE SURE COMBINATION LOCKS ARE ORIENTED CORRECTLY DURING INSTALLATION)
- INSTALL NEW LATCH BAR
- INSTALL HANDLE