

DESCRIPTION

- Metal construction with chrome plated, LifeShine® brushed nickel, or LifeShine® hammered nickel finishes
- Includes 7" rainfall showerhead, arm and flange
- For use with S932 valve

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 2°F

FLOW

- Showerhead is limited to 2.5 gpm max. (9.5 L/min)

CARTRIDGE

- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

STANDARDS


- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein, including ASSE 1016

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




Lever Handles

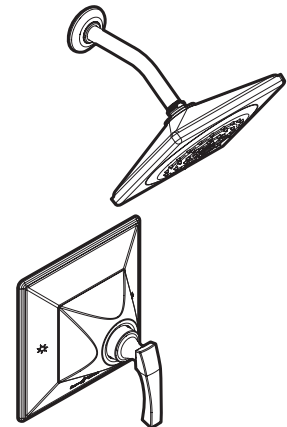

**Divine™
Single-Handle Posi-Temp®
Shower Trim**

Models: TS352, TS352BN, TS352HN

Valve: S932

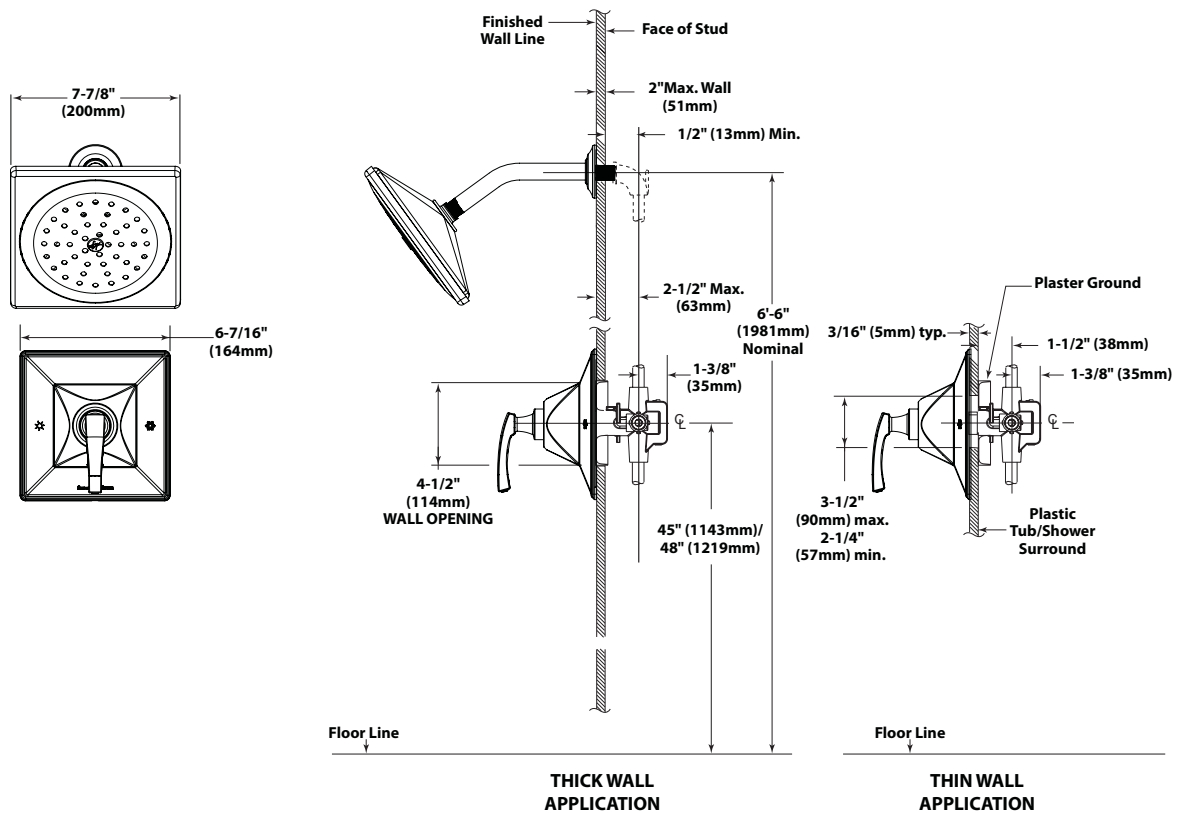

CRITICAL DIMENSIONS
(DO NOT SCALE)