


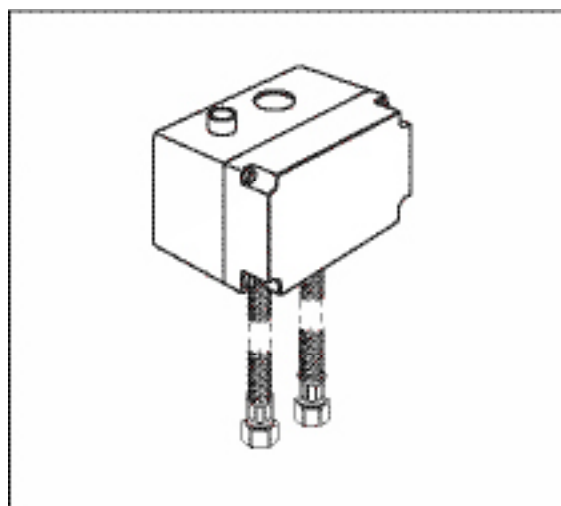

GENERAL DESCRIPTION:



Below deck thermostatic water mixing valve to be used with Selectronic™ faucets. Adjustable temperature by using a 4mm Hex Wrench. To decrease temperature, rotate clockwise. To increase temperature, rotate counter-clockwise.

PRODUCT FEATURES:

- 3/8" Stainless steel compression flex hoses, 20" length included
- Meets ASSE1016
- Anti-scald protection
- NSF 61/Section 9

MODEL NUMBER:

- ☐ **605XTMV** Recommended to be used with Selectronic™ faucets that are specified with the "TMV" (Thermostatic Mixing Valve) variation, or available separately.

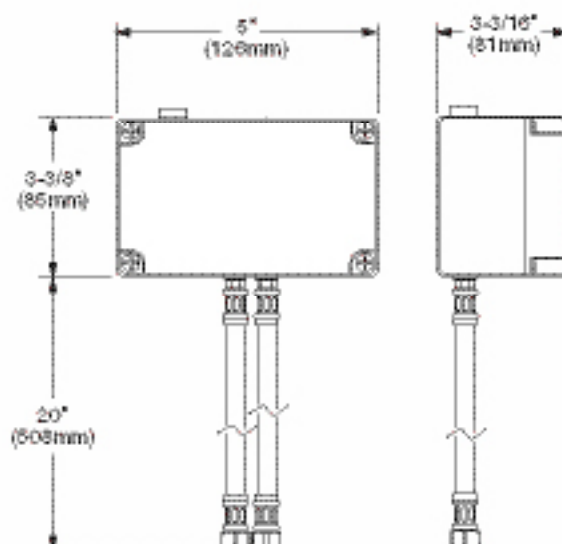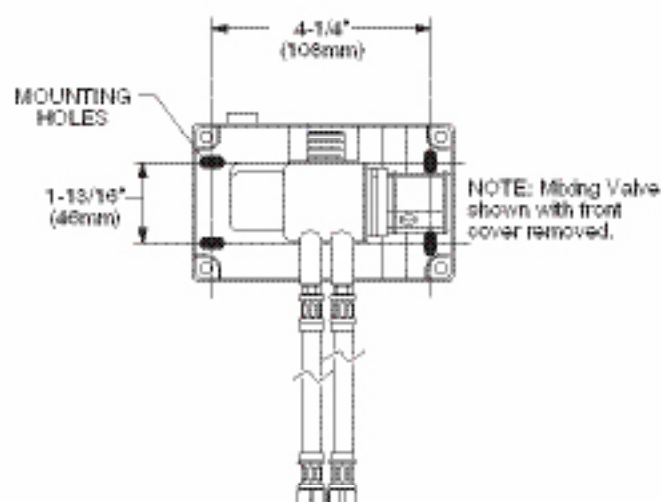

RECOMMENDED SPECIFICATION

The Mixing Valve shall be of thermostatic type. Shall also meet ASSE 1016 performance and anti-scald requirements at 0.50 GPM. Fitting shall be American Standard Model # 605XTMV.